

Amarr® Designer's Choice

Energy Efficient Steel Carriage House Garage Doors



Bead Board design with Stockton DecraTrim in True White with Blue Ridge decorative hardware

Design and energy efficiency make the Amarr Designer's Choice doors popular models. With triple-layer construction and superior insulation R-Value of 19.40*, these durable low-maintenance doors give you the ultimate in quiet operation and energy efficiency.



Recessed design with Stockton DecraTrim in Black

Bead Board with Cascade DecraTrim (BB23)



Recessed Closed (RE)

Long Bead Board with Stockton DecraTrim (LPBB20)



Bead Board with Mission DecraGlass (BB71)



Recessed with Moonlite DecraTrim (RE24)




PANEL DESIGNS


BB • BEAD BOARD



LPBB • LONG BEAD BOARD



RE • RECESSED



ENERGY EFFICIENCY




R-value 19.40*

For the best thermal performance, select a door with a low U-factor (less heat transfer) or high R-value (more heat resistance) rating.

*DC3200 True White Bead Board only.

Construction

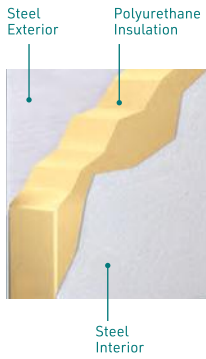

STEEL DC3138/DC3200

Triple-Layer: Steel + Insulation + Steel

For the toughest most energy-efficient steel door, Amarr Designer's Choice triple-layer doors include the ultimate in thermal properties, plus a layer of steel for a finished interior look and added durability.

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polyurethane insulation
- Superior energy efficiency
- Extra quiet operation

Specifications

	AMARR DESIGNER'S CHOICE DC3138	AMARR DESIGNER'S CHOICE DC3200
PANEL DESIGNS		
Bead Board	TW/Color Zone	•
Long Bead Board		•
Recessed		•
INSULATION	Polyurethane	Polyurethane
U-FACTOR	0.24	0.19†
R-VALUE¹	14.46	19.40 - 13.35
DOOR THICKNESS	1-3/8" (3.5cm)	2" (5.1cm)
STEEL THICKNESS	27/27 ga	27/27 ga
WOODGRAIN EXTERIOR TEXTURE	•	•
END STILES Painted	•	•
BOTTOM WEATHER SEAL	•	•
DECORATIVE GLASS OPTIONS	All	All
INSULATED GLASS OPTIONS*	•	•
WIND LOAD² AVAILABLE	•	•
DOOR WIDTHS	8', 9', 16'	All Standard Sizes
DOOR HEIGHTS	All Standard Sizes	All Standard Sizes
PAINT FINISH WARRANTY³	Lifetime	Lifetime
WORKMANSHIP/HARDWARE WARRANTY³	5 Years	Lifetime

¹ Calculated door section R-value is in accordance with DASMA TDS-163. ² It is your responsibility to make sure your garage door meets local building codes. ³ For complete warranty details, visit amarr.com or contact your local Amarr dealer. Verified thermal performance rating per DASMA Thermal Performance Verification Program.

*Price upcharge applies. †True White Bead Board only. Rating for other colors and panels not currently available.


Colors

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



Amarr Color Zone
Over 800 Sherwin-Williams® SnapDry™ paint colors; approved color list is at amarr.com/amarr_color_zone.

Visit your local Sherwin-Williams store for paint chips.



Amarr doors are pre-painted; homeowners can use exterior latex paint for custom colors. Visit amarr.com for painting instructions. Non-factory painting of garage door voids the paint finish warranty.

Amarr Company
165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com



Door specifications and technical data subject to change without notice.

Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.


Part of ASSA ABLOY.

Amarr as word and logo are trademarks belonging to Amarr Company, owned by ASSA ABLOY.

©ASSA ABLOY
Printed in USA Form #6391123/15M/S4

Glass Options

Insulated glass* available in Clear, Frost and Dark Tint.

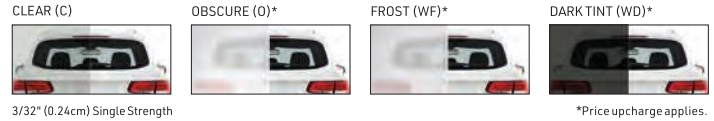


DecraTrim Window Inserts

Window inserts shown on Clear glass; inserts also available with Obscure, Frost and Dark Tint glass.




DecraGlass™ Windows

Tempered obscure glass with baked-on ceramic designs; design visibility varies due to lighting.

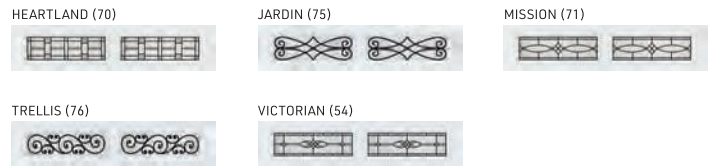

Decorative Hardware

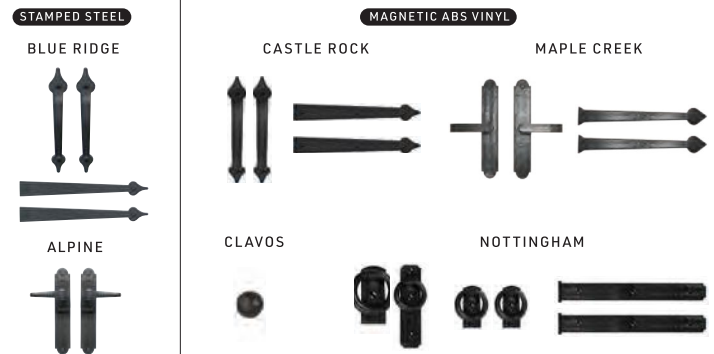

Amarr participates in the DASMA Thermal Performance Verification Program. The program verifies the thermal performance of a complete sectional door assembly. The lower the U-factor rating, the better the thermal performance.